



With its small tank and top inlet, Saniaccess 2 can be used to pump out waste water from a toilet and a wash basin together.



5 m
100 m

SANIACCESS® 2


| | |
|--------------------------------|----------------------|
| Inlet diameter | 40 mm |
| Discharge pipework | 22/28/32 mm |
| IP rating | IP 44 |
| Electrical power supply | 220-240 V / 50-60 Hz |
| Motor power | 400 W |
| Weight | 6.8 kg |
| Non-return valve included | |
| Active carbon filter included | |

VERTICAL AND HORIZONTAL
DISCHARGE: ↑ 5 m → 100 m



BENEFITS

- Easy service access
- Quiet technology

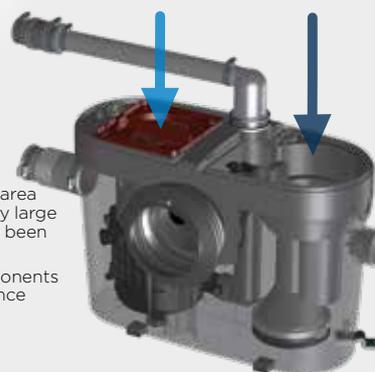

Double access:

- ➔ To the cutting system area for easy removal of any large objects that may have been accidentally flushed
- ➔ To the electrical components for periodic maintenance

