



**NEW 2018**  
Tiled version available

A built-in frame system designed to accommodate all types of wall-hung WC (not supplied). Saniwall has a dual flush system and an integrated macerator pump.



Ideal for wall-hung WC



**GROHE**

# SANIWALL® Pro UP

Inlets diameter	40 mm
Discharge pipework	22/32 mm
IP rating	IP 44
Electrical power supply	220-240 V / 50-60 Hz
Motor power	400 W
Cistern dual flush	3 L/6 L
Weight	15 kg
Glass panels included	
Flush plate included	
Adjustable feet allow variable heights of pan	
Non-return valve included	
Active carbon filter included	

V1

VERTICAL AND HORIZONTAL DISCHARGE: ↑ 5 m → 100 m

V2

### 2 versions of GROHE frame:




**V1** For fixation into the floor (non-loadbearing walls), wall anchorings supplied (WALLPROUPSTD)

**V2** For fixation into rails or into loadbearing walls (WALLPROUPD)



### Double access:

- ➔ To the cutting system area for easy removal of any large objects that may have been accidentally flushed
- ➔ To the electrical components for periodic maintenance

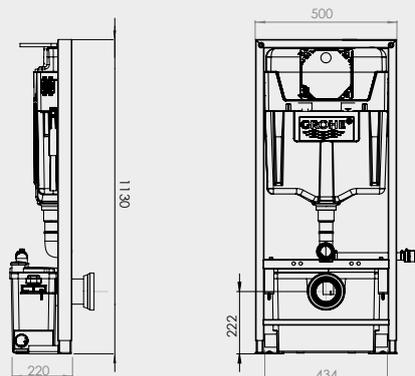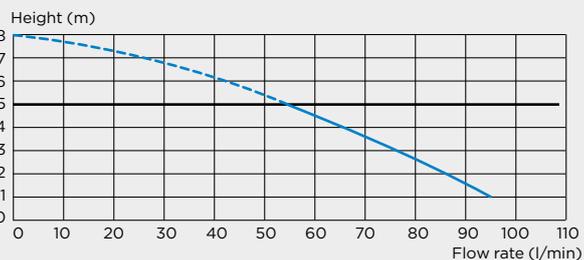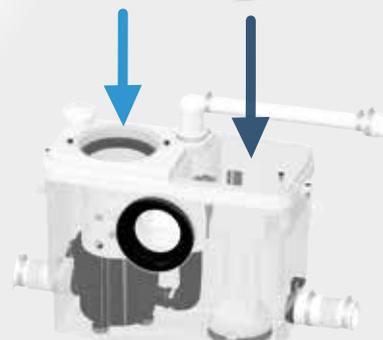

### BENEFITS

- Designed with Grohe cistern technology
- Built in Grohe frame system with an elegant glass wall covering
- Grohe chromed flush plate included
- Quiet flush system
- Access trap for easy maintenance