



Its high capacity tank enables Saniplus to pump away large quantities of waste waters from the bathroom. Its specific motor enables it to function for longer periods.





SANIPLUS®



Inlets diameter	40 mm
Discharge pipework	22/28/32 mm
IP rating	IP 44
Electrical power supply	220-240 V / 50-60 Hz
Motor power	400 W
Weight	7.4 kg
Non-return valve included	
Active carbon filter included	



VERTICAL AND HORIZONTAL
DISCHARGE: ↑ 5 m → 100 m

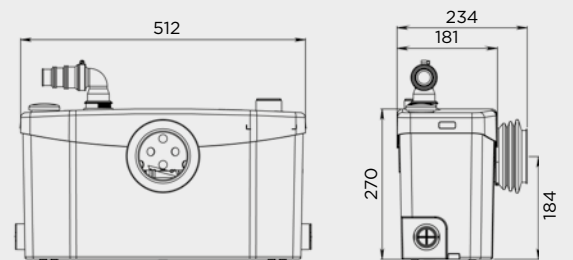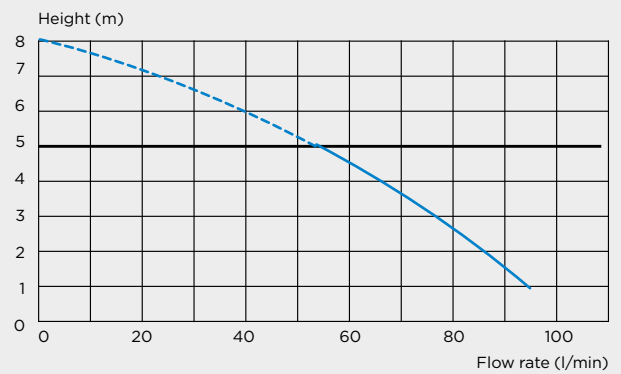

BENEFITS

- 3 inlets and a greater tank capacity
- Works with high output power showers