



The unique solution for S-trap toilets.



S-trap toilet

7 m  
↗  
110 m

# SANIGRIND® Pro

|                               |                      |
|-------------------------------|----------------------|
| Inlets diameter               | 40 mm                |
| Discharge pipework            | 22/28/32 mm          |
| IP rating                     | IP 44                |
| Electrical power supply       | 220-240 V / 50-60 Hz |
| Motor power                   | 1100 W               |
| Weight                        | 12 kg                |
| Non-return valve included     |                      |
| Active carbon filter included |                      |

VERTICAL AND HORIZONTAL  
DISCHARGE: ↑ 7 m → 110 m





EASY SERVICE  
ACCESS PANEL



Cover gives direct  
access to electronic  
components



Robust blade suitable for heavy usage.  
Designed to handle accidental flushing  
of sanitary items.

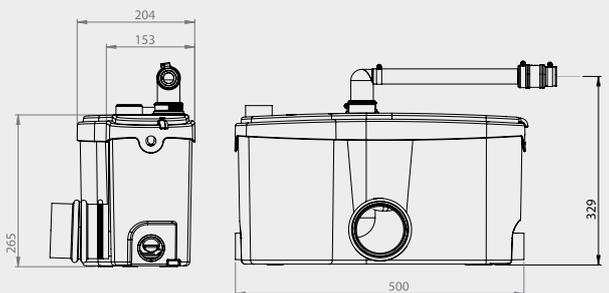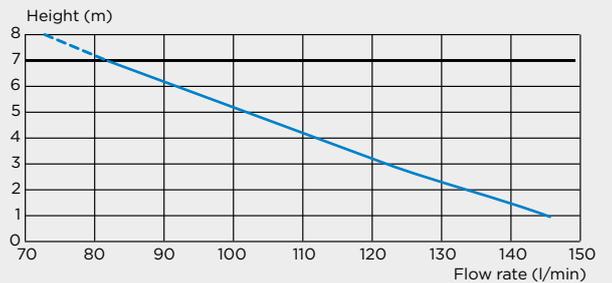

## BENEFITS

- Ideal for public usage
- Vertical discharge : 7m
- The possibility to lower the pump