



Its small dimensions and starting level makes the Sanishower perfectly adapted to fit under a shower tray or discreetly within a piece of furniture. The second inlet gives the possibility to install a wash basin or bidet.



# SANISHOWER®



## PUMP TECHNICAL DATA

<b>Maximum flow rate</b>	
Sanishower	70 L/min
Sanishower Flat	45 L/min
<b>Shut-off head (Q=0 l/min)</b>	
Sanishower	6 m
Sanishower Flat	5 m
<b>IP rating</b>	
IP 44	
<b>Tank volume</b>	
3,5 L	
<b>Free passage</b>	
Sanishower	8 mm
Sanishower Flat	5 mm
<b>Discharge pipe diameter</b>	
Ø ext. 32 mm	
<b>Inlets diameter</b>	
Sanishower	1 inlet Ø ext. 40 mm
	1 inlet Ø ext. 32/40 mm
Sanishower Flat	1 inlet Ø ext. 40 mm
	1 inlet Ø ext. 32 mm
<b>Low inlets height</b>	
31 mm	
<b>Activation level ON (compared to ground level)</b>	
Sanishower	60 mm
Sanishower Flat	30 mm
<b>Weight</b>	
Sanishower	4.6 kg
Sanishower Flat	5 kg
<b>Non-return valve included</b>	

## MOTOR DATA

<b>Electrical power supply</b> : Single-phase 220-240 V / 50-60 Hz	
<b>Electrical power rating</b>	250 W
<b>Maximum current input</b>	1,3 A
<b>Electrical class</b>	I
<b>Thermally protected</b>	
Oil-filled	

## MATERIALS

<b>Motor body:</b> Polyamide	<b>Pump cover plate:</b> Polyamide
<b>Impeller:</b> Polypropylene	<b>Motor shaft:</b> Stainless steel
<b>O-Ring:</b> Nitrile	<b>Sealing ring:</b> Nitrile



Also available  
**SANISHOWER® Flat**



Tray Height  
**8 CM**

VERTICAL AND HORIZONTAL DISCHARGE: **↑ 3 m → 30 m**

The Sanishower Flat, supplied with a flat siphon, has a lower activation level than the Sanishower. It can be installed with a low level tray (80mm high).

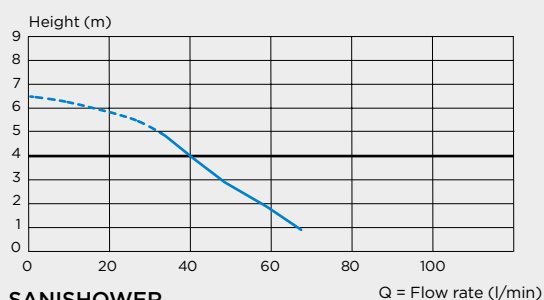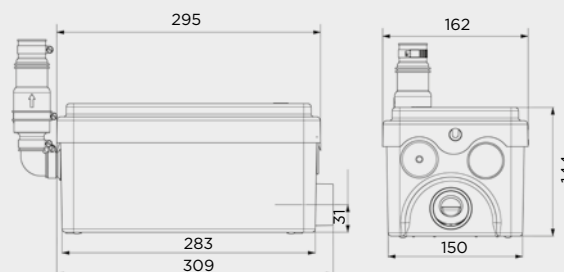

SANISHOWER

Q = Flow rate (l/min)